

A-1712

PA AMPLIFIER

Equipped with 6 Microphone inputs and 5 AUX inputs (simultaneous use of 9 inputs possible), the A-1712 PA amplifier of 120 W is designed to suit the following PA system applications: announcements, BGM, and broadcasting in mosques, churches, large rooms, and factories.




Article number:A-1712 ER
Alternative products: A-1706, A-1724


Specifications

Power source	220 - 230 V AC, 50 / 60 Hz
Rated output	120 W
Power source	220 - 230 V AC, 50 / 60 Hz
Rated output	120 W
Frequency response	50 Hz - 20 kHz (± 3 dB)
Frequency response	50 Hz - 20 kHz (± 3 dB)
Power consumption	258 W
Distortion	< 2 % (at 1 kHz, rated power)
Current consumption	or less
S/N ratio	100 dB (Master volume: min)
Number of channels	1
Connectable microphones	6
Current consumption	or less
S/N ratio	100 dB (Master volume: min)
Inputs	Mic 1-6 -60 dBV, 600 Ohm, electronically-balanced, combined type of XLR-3-31 equivalent and phone jack AUX 1 - 2: -20 dBV, 600 Ohm, electronically-balanced, combined type of XLR-3-31 equivalent and phone jack . Either MIC 5 or AUX 1, and either MIC 6 or AUX 2 selectable. AUX 3 - 4: -20 dBV, 10 kOhm, unbalanced, RCA pin jack AUX 5: -20 dBV, 10 kOhm, unbalanced, combined type of XLR-3-31 equivalent and phone jack PWR AMP IN: 0 dBV, 600 Ohm, unbalanced, RCA pin jack (An equalizer or other signal processor connectable between LINE OUT and PWR AMP IN terminals)
Outputs	REC: 0 dBV, 600 Ω , unbalanced, RCA pin jack SPEAKER: 100 V (83 Ω), 4 – 16 Ω
Distortion	< 2 % (at 1 kHz, rated power)
Finish	Steel plate, ABS resin, hairline, black,


Appearance

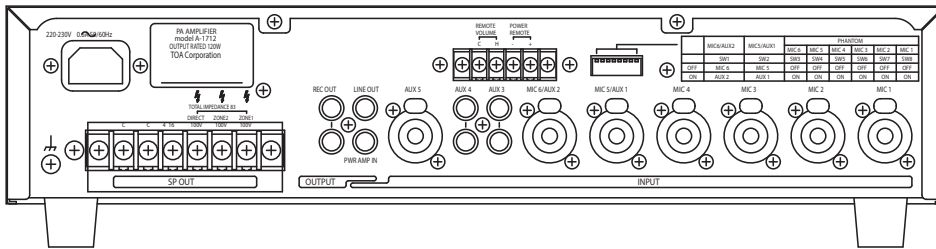

Rear View

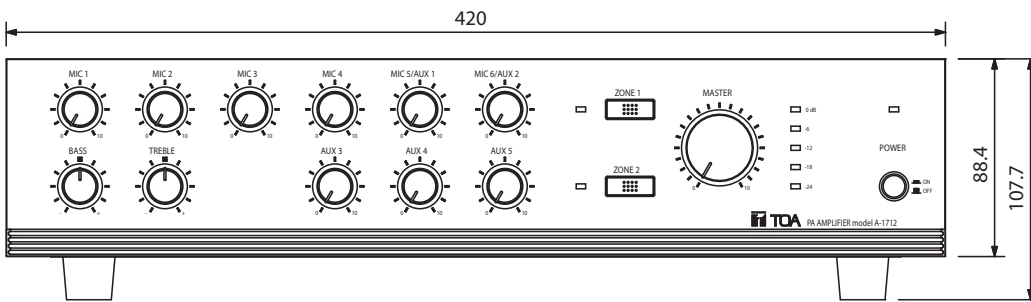

Front View

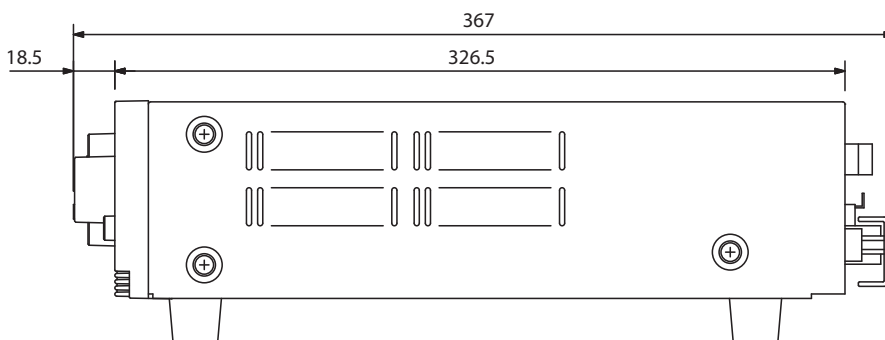

Side View

UNIT:mm SCALE:1/3