

# DHI-DSS4004-T

## General Surveillance Management Center



### Introduction

DSS4004 is an all-in-one server that is composed of Dahua's video management system (VMS), center storage, Operating System and hardware. It is easy to deploy and operate.

DSS4004 provides the best level of support while maintaining an easy-to-use interface for operators and technicians.

### Features

#### System Stability

- Embedded Linux System, C/S Architecture
- Support 7\*24 stable operation
- Support distribute and cascade deployment
- Support hot standby for master server
- Support N+M hot standby for slave server

#### High Compatibility

- All Dahua's devices included: network camera, network speed dome, NVR, DVR, MDVR, ITC, Access control, VDP, etc.
- Connect third-party devices via standard ONVIF protocol
- Offer the platform SDK for third-party platform or mobile phone do further development

#### High Flexibility and Scability

- Up to 20 slave server can be managed per master server
- Support up to 5-level cascade
- Support unlimited accounts management, 50 online users and unlimited users
- Support 256 devices (20 ANPR devices), 256 channels

#### Basic Functions

- Manage the device and user from the different organization
- Assign different camera range, active period and business modules for different user
- Set the different scheme for different events (include intelligent video analysis events), record and view all event history information
- Live view, PTZ control, snapshot, instant playback, customized layout
- Playback the records from the front end devices or center
- Lock and mark the important records for center storage
- Smart search can find the motion information in assigned region quickly
- Fisheye Dewarping whether live view or playback
- Push the real-time video, alarm linkage video and playback video to the TV Wall
- Support up to 16 channels sync playback
- Support Onvif standard protocol connection
- Support GIS map(Google, RasterMap)
- Support Yahoo, Gmail, Hotamil

## Traffic Module Functions

- .Support car speed recognition
- .Support license plate recognition
- .Support car violation recognition
- .Support region average speed measure
- .Support blockcarlist

## Performance Specification

### System

Main Processor	64 bit 4 core CPU
Operating System	Embedded Linux
Memory	4GB
Chassis	1.0mm SGCC steel plate
Interface	
Network Port	4 RJ-45 Ports ( 10/100/1000Mbps )
Ethernet Port	4 Ethernet Ports Joint Working or 4 Independent 1000Mbps Ethernet Ports
RS232	Reserved
RS485	Reserved(reusable with alarm port)
Alarm input/output	Reserved(reusable with alarm port)
USB Port	Front panel: 2× USB 3.0, Rear panel: 2 × USB 2.0
HDMI	2 HDMI, one as network config, another as spare
VGA	1 VGA, as network config
HDD Installation	Built-in 1× 1T HDD disk (2.5") for system Support 3HDD disks (2.5") for Video &Picture storage

## Video Management


Number of Connected Cameras Per Server	256
Clients Per System	50 online users and unlimited users
Numbers of Users	Unlimited
Numbers of Roles	500
Bandwidth of Video Input per Server	350 Mbps
Bandwidth of Video Output per Server	350 Mbps
Bandwidth of Video Storage per Server	100 Mbps

### Other


Power	100V ~ 240V, 47 ~ 63Hz
Consumption	35W ~ 50W (with HDD)
Working Environment Temperature	0 ℃ ~ 50 ℃
Working Environment Humidity	5%~90% (non-condensation)
Storage Environment Temperature	-20 ℃ ~ +70 ℃
Storage Environment Humidity	5% ~ 90% (non-condensation)
Working Altitude	-60m ~ 3000m
Weight (Without Package)	4.5Kg
Dimension	1U, 440mm×398.6mm×43.6 mm
Installation Method	Standard 19" rack installation

# DHI-DSS4004

## Physical Interface

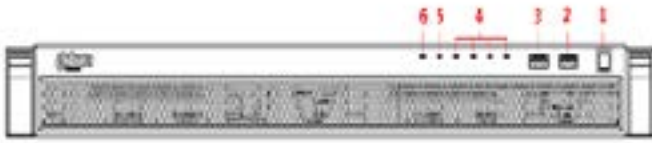

- 1- Power Button
- 2- USB 3.0
- 3- USB 3.0
- 4- HDD Status
- 5- Alarm Indicator
- 6- Network Indicator



- 1- Power Interface
- 2- Audio Output
- 3- Audio Input
- 4- Ethernet Port 1~2
- 5- Ethernet Port 3~4
- 6- RS232 Interconnects
- 7- Video VGA Output
- 8- HDMI1
- 9- HDMI2
- 10- USB2.0x2
- 11- eSATA Interface
- 12- Alarm In & Out

## Dimensions (mm)

