

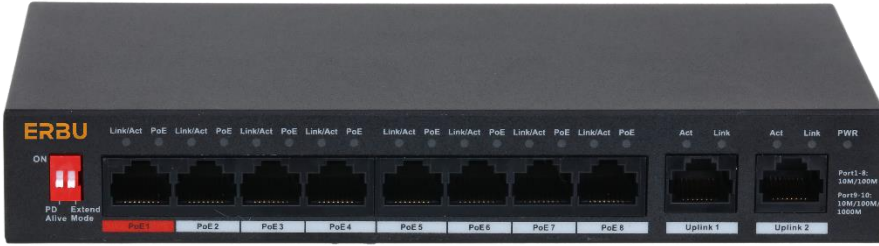
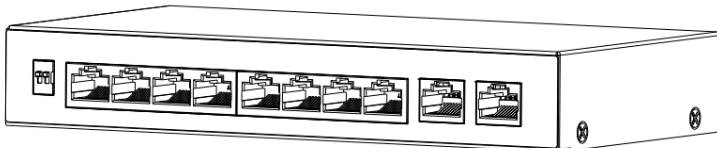


ES-1000-90-96


10 Port Desktop Switch with 8 PoE Ports

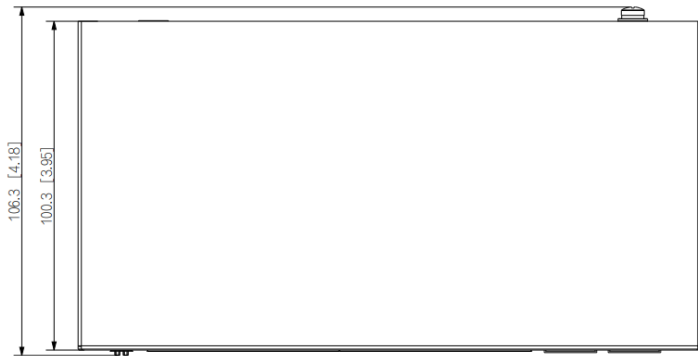

Dimensions mm (inch)

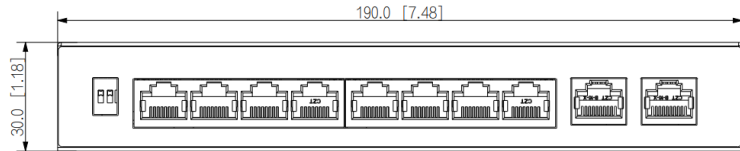

Panels



Technical Specification

Hardware

Data Transmission Port	Port 1–8: 8 × RJ-45 10/100 Mbps (PoE) Port 9-10: 2 × RJ-45 10/100/1000 Mbps (Uplink)
Power Supply	48 V - 57 V DC
Operating Temperature	-10°C to +55°C
Operating Humidity	5%–95%
Storage Temperature	-20°C to +70°C
Storage Humidity	5%–95%
Power Consumption	Idling: 3 W Full load: 96 W

SMD Plus by Camera

Switching Capacity	5.60 Gbps
Packet Forwarding Rate	4.17 Mpps
Packet Buffer Size	4 Mbit
MAC Table Size	8K
Communication Standard	IEEE802.3/IEEE802.3u/IEEE 802.3ab/IEEE802.3x

Technical Specification

PoE

PoE Standard	IEEE802.3af; IEEE802.3at; Hi-PoE; IEEE802.3b
PoE Power	96 W
PoE Power Consumption Management	Yes
PoE Pin Assignment	1, 2, 4, 5 (V+), 3, 6, 7, 8 (V-)
Far Distance Mode	250 m
PoE Watchdog	Yes

General

Statics Protection	Air discharge: 8kV Contact discharge: 6kV
Thunderproof	Common mode: 4 kV Differential mode: 2 kV
Net Weight	0.5 kg
Gross Weight	1.32 kg
Product Dimensions	190 mm × 100 mm × 30 mm