

VP-2421incl

POWER AMPLIFIER

The VP-2421 Power Amplifier features a 420 W-by-1 channels configuration, and uses the VP-200VX Power Amplifier Module per channel.



Order no: VP-2421 INCL


Specifications

Power source	28 V DC (operating range: 20 – 40 V DC) M4 screw terminal
Rated output	1 x 420 W
Frequency response	40 Hz - 16 kHz (±3 dB)
Distortion	< 1 %
Distortion	< 1 % (at 1 kHz, rated input/output)
Current consumption	7,6 A
S/N ratio	80 dB
Inputs	Specified by input module VP-200VX
Outputs	Power amplifier output (speaker line): M3.5 screw terminal
Number of channels	1
Indicator	Channel power indicator: 4 channels, dual colour LED; Overheat indicator: Yellow LED
Dimensions (W x H x D)	482 x 88,4 x 340,5 mm
Dimensions (ø x D)	x 340,5 mm
Finish	Steel plate, surface-treated, 30% gloss, paint, black


VP-2421incl

POWER AMPLIFIER


Appearance

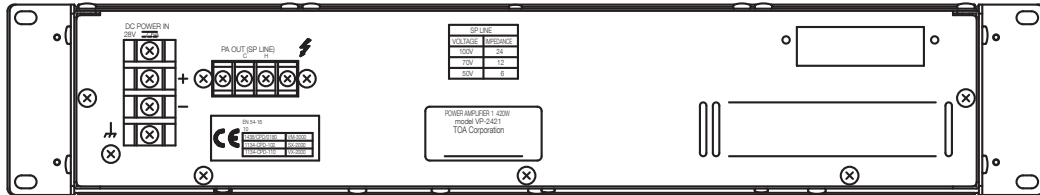

Rear View

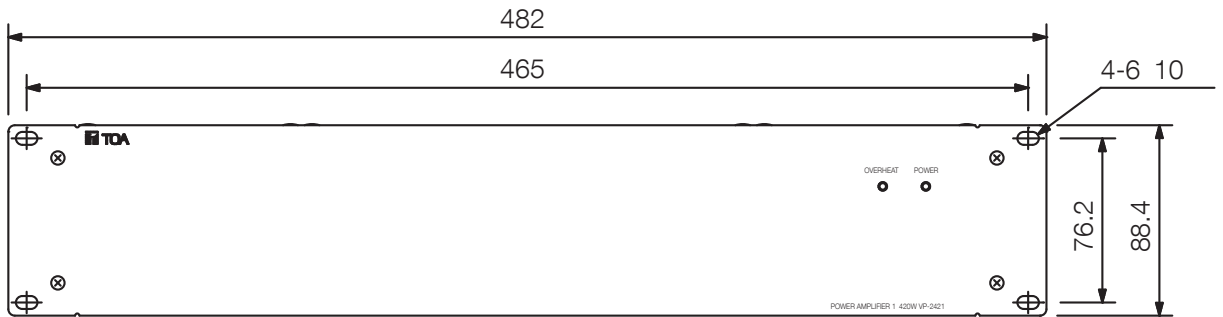

Front View

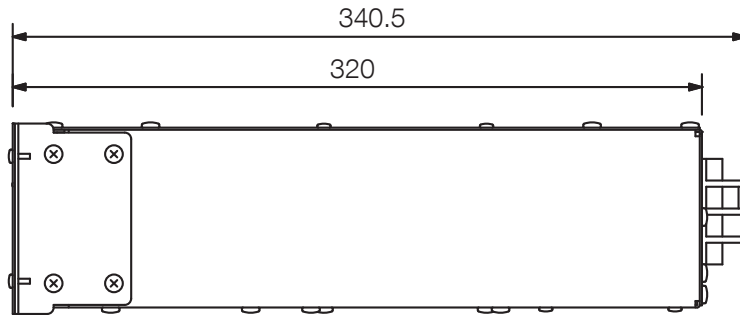

Side View

UNIT:mm

SCALE:1/4